

BLACKMER PUMPS

BLACKMER HAND PUMPS

For clean, safe, and convenient dispensing of liquids from barrels, drums, skid tanks, day tanks, underground tanks, etc. These Blackmer Hand Pumps are used universally by construction contractors, oil companies, industrial plants, original equipment Manufacturers, etc. . . . because of their many valuable features.

Available in two basic types:

Flo-Master hand pumps

Self priming • Corrosion resistant
High capacity
(See Blackmer Bulletin 310)

Rotary hand pumps

Rugged construction • Self priming
Positive displacement
(See Blackmer Bulletin 320)

Available in a wide selection of models for various delivery rates and with numerous sets of accessories for adoption to installation with drums, tanks, vats, etc.

Basic pump models	Rated capacity in Gal-lons	Intake and outlet sizes	Models complete with Accessories						Used with liquid viscos-ities which are
			Barrel models with suction pipe and						
			Discharge spout				Hose and nozzle		
210	10	¾" x ¾"	AT210	CS210	ND210	SD210	BR210	HS210	Light
404	10	1"x1"	AT404	-----	ND404	-----	BR404	-----	Light
414V	14	1"x1"	AT414V		ND414V	SD414V	BR414V	-----	Med.
525	25	¾" x ¾"	AT525B	-----		-----	BR525	-----	Light
525C	25	1"x1"	AT525C	-----	-----	-----	BR525C	-----	Light
828V	28	1"x1"	AT828V	-----		-----	BR828V	-----	Light
807V	7	1 ¼" x1 ¼"	AT807V	-----	-----	-----		-----	Hvy.




In the plant



Fueling contractor's equipment




On the farm

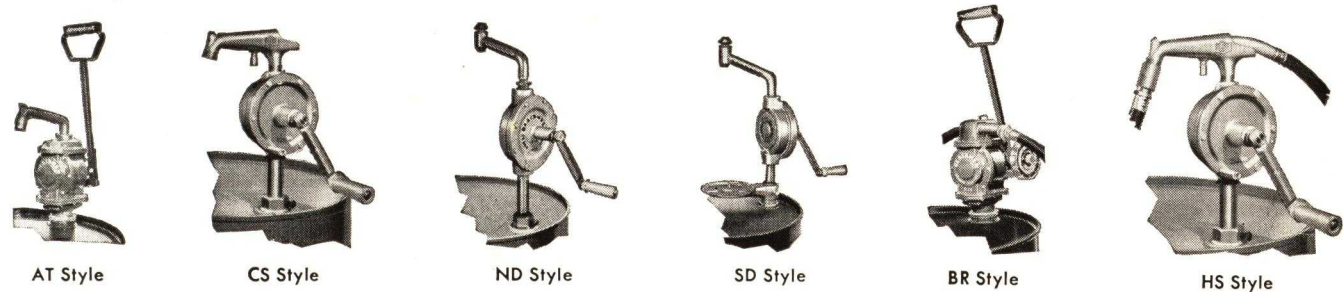

BLACKMER POWER DRIVEN PUMPS

For a wide range of applications select Blackmer Vane-type rotary pumps with their outstanding characteristics of "self adjusting for wear."

Available sizes	1 ¼" thru 8"
Range of capacities	10 GPM thru 1500 GPM
Differential pressures	up to 125 psi
Liquid viscosities	up to 100,000 SSU
Liquid temperatures	up to 450° Fah.

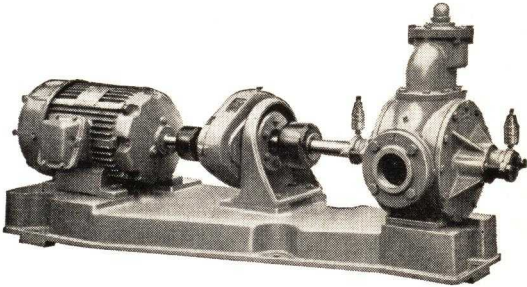

For complete details request bulletin ONE

Protect pumps with Blackmer ezy-kleen strainers

Pumps should be protected from clogging and damage by foreign materials by installing an EZY-KLEEN strainer in the suction line. Available in pipe sizes 1 ¼" thru 6". For complete details request bulletin 400.

